


- connect up to 4 lines as shown (refer to full manual for full instructions), for PBX type phone with a moh jack you may connect a rca auto cord to the **Red jack** (not pink), connect the external speaker for reminder audio to EXT jack (pink)
- connect power, wait 2 mins for startup, test the audio via speaker in ON position 1st, then set to R position – keep other switches in **A** and **3** as shown

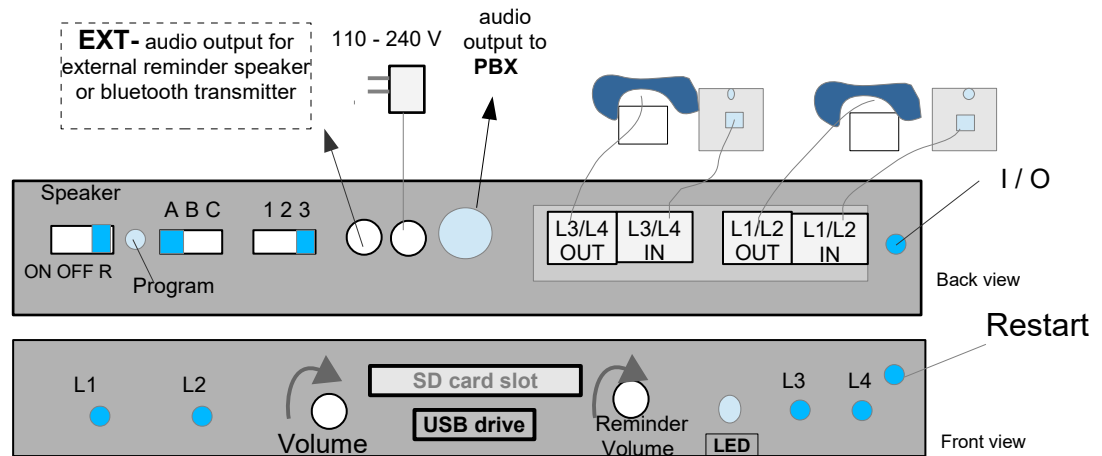

Volume: clockwise for Volume UP (maximum 4 o'clock), counter clock-wise for Volume DOWN (minimum 8 o'clock) do not turn volume knobs past these levels

Reminder Volume: for internal speaker telling you which line you need to pickup next - set as desired, for louder reminder set this volume to maximum (clockwise) and use the external speaker volume as desired.

I/O: click to temporary sleep the device so that it does not answer any calls LED goes Blue +Red click again to wake it up

ABC: keep it in A for “AI” to automatically learn your hours to sleep and wake device automatically use B to manually control device sleep/awake via I/O use C to keep device in sleep mode

123: keep in 3 for most phones (contact support for using 1 or 2 setting in special cases)

Speaker : ON to test audio – R to hear reminder audio with internal speaker - OFF to use external speaker

LED status summary:

Blue	Device in full operation with auto answer (Awake)
Blue+RED solid	no auto answer (Sleep)
Blue+RED blinking	Line 1 not connected yet
Red solid	Device stopped operation or line 1 not connected

You may click the Re-start button to re-start the device in case of any issues

Call Handling Configuration and changes:

call the support number **310-853-3966** for any questions or changes needed to your custom greeting
for a full version of the manual go to **iHoldmusic.com ---> Manuals**

Package Content:

PizzaLine™ device
Power adapter 110/240v AC to 5V DC 2A
RJ-14 phone cords 2 pcs
USB flash Drive (SD card not needed and not included)
RCA to RCA audio cord (for PBX installs only)
RCA to 3.5mm audio adapter
Wall mount screws 2pcs
Quick User's Manual
Speaker system for extra loud reminder

Other options: External Timer, Bluetooth wireless adapter for
external wireless speaker (up to 160 feet)

Warranty

Unless otherwise specified on your order this interface box is warranted against defects for a period of "Life Time", we will repair/replace the interface box with no charge for parts or labor as long as your service plan is current. To obtain service the interface box needs to be returned freight prepaid by the customer. This warranty does not apply if in the sole opinion of Innovative Telecommunication Technology LLC, the product has been tampered with or damaged by lightning or any other acts of nature, misuse, neglect or unauthorized service.

EXCEPT AS SPECIFICALLY PROVIDED IN THIS AGREEMENT, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR OTHERWISE, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A SPECIAL PURPOSE. IN NO EVENT SHALL INNOVATIVE TELECOMMUNICATION TECHNOLOGY LLC BE LIABLE FOR LOSS OF PROFITS OR BENEFITS, INDIRECT, SPECIAL, CONSEQUENTIAL OR OTHERWISE ARISING FROM ANY BREACH OF THIS WARRANTY OR OTHERWISE.

Audiolmage™

Innovative Telecom
1112 Montana Ave Suite 250 Santa Monica, CA 90403 USA
<http://www.iholdmusic.com> Phone: 310-853-3966